

# (12) UK Patent Application (19) GB (11) 2 349 798 (13) A

(43) Date of A Publication 15.11.2000

(21) Application No 0011587.3

(22) Date of Filing 12.05.2000

(30) Priority Data

(31) 8911058

(32) 12.05.1999

(33) GB

(51) INT CL<sup>7</sup>

A41D 13/00

(52) UK CL (Edition R)

A3V V5E1 V5E2

(56) Documents Cited

US 5854143 A

US 5599290 A

US 5090053 A

US 3849428 A

(58) Field of Search

UK CL (Edition R) A3V

Online : WPI, EPDOC, PAJ.

(71) Applicant(s)

Daniel James Plant

Llanwrtnny Farm, Llangovan, MONMOUTH,  
Monmouthshire, NP5 4BU, United Kingdom

(72) Inventor(s)

Daniel James Plant

(74) Agent and/or Address for Service

Vanner Shipley &amp; Co

20 Little Britain, LONDON, EC1A 7DH,  
United Kingdom

(54) Abstract Title

Protective member

(57) A protective member primarily for use as an energy absorbing pad for incorporation into garments to protect the wearer against accidental impacts. The member comprises a putty-like energy absorbing material (2) encapsulated in a flexible envelope (3,4). The energy absorbing material is normally soft and flexible but changes to become temporarily rigid when an impact force is applied thereto, thereby absorbing the impact energy, the material returning to its normal flexible condition after the impact. The energy absorbing member preferably comprises a series of connected corrugations to increase its energy absorbing properties.

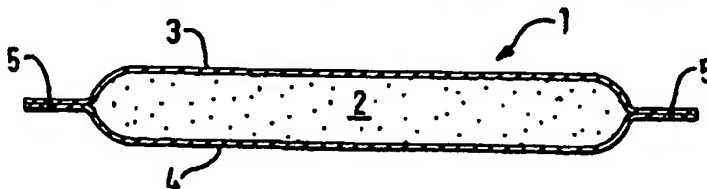


FIG. 2

inventor  
has lots  
of patents

1/5

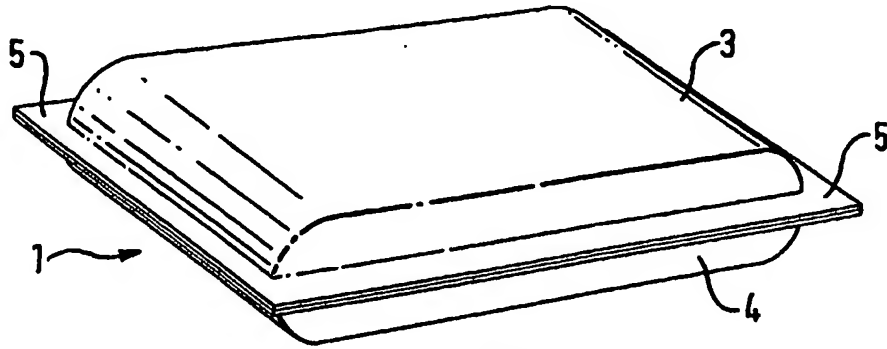


FIG. 1

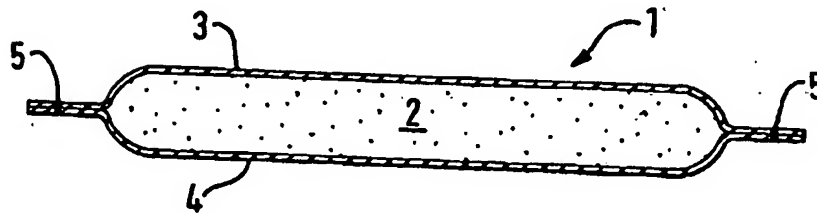


FIG. 2

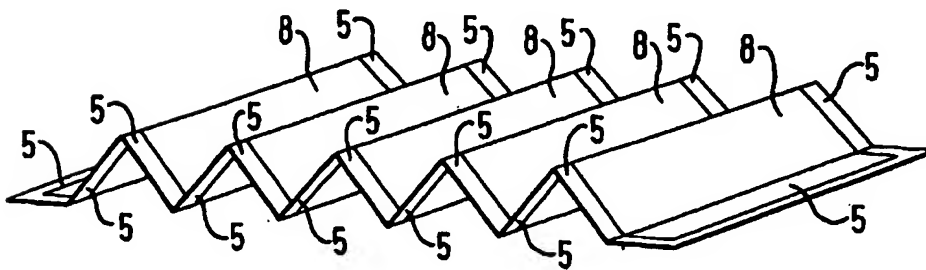


FIG. 3

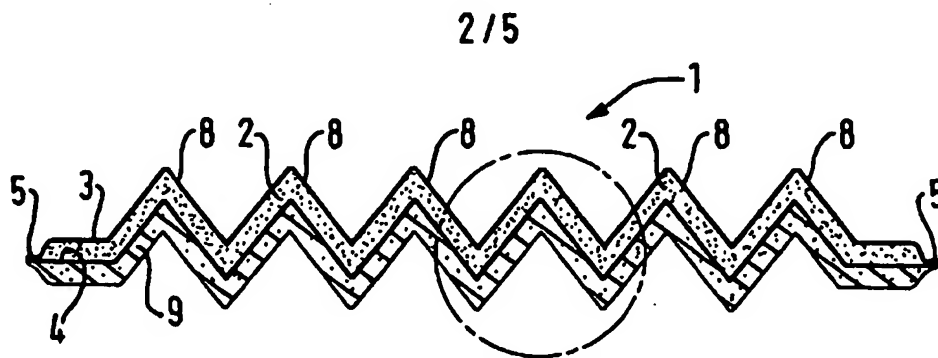


FIG. 4

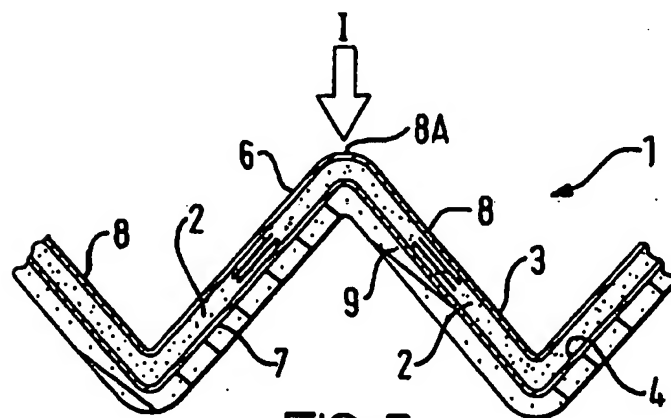


FIG. 5

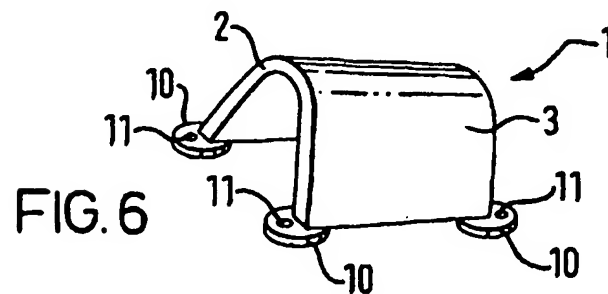


FIG. 6

3/5

FIG. 7




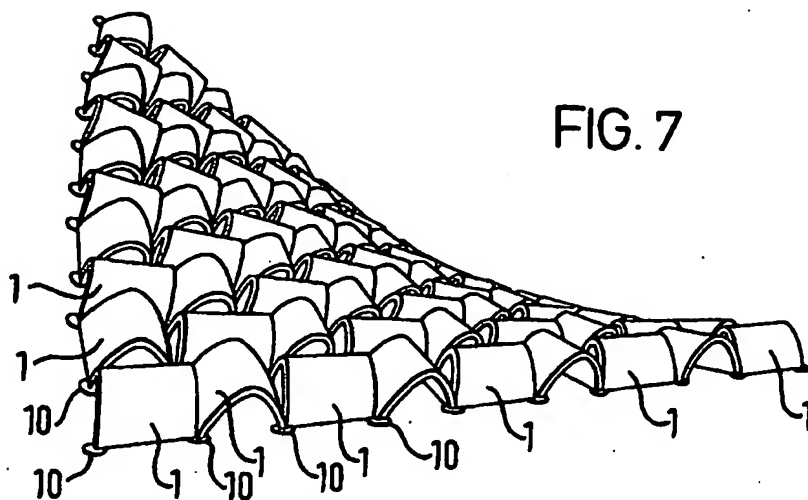


FIG. 8

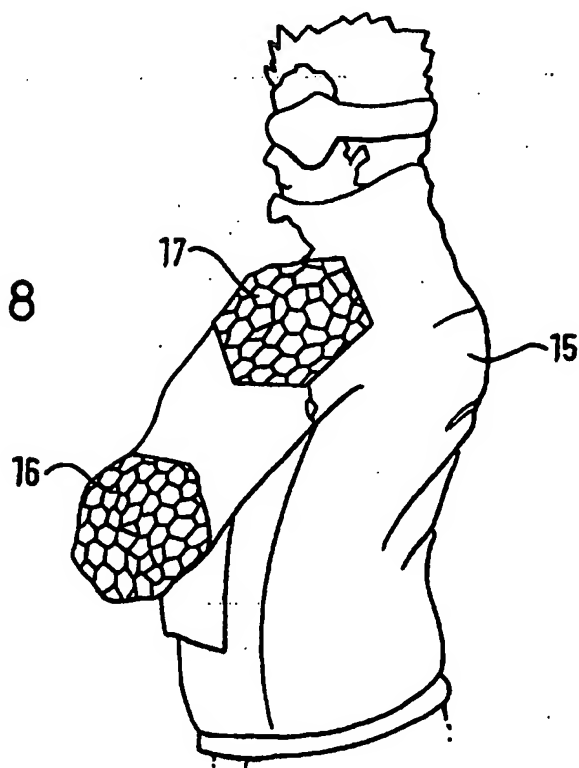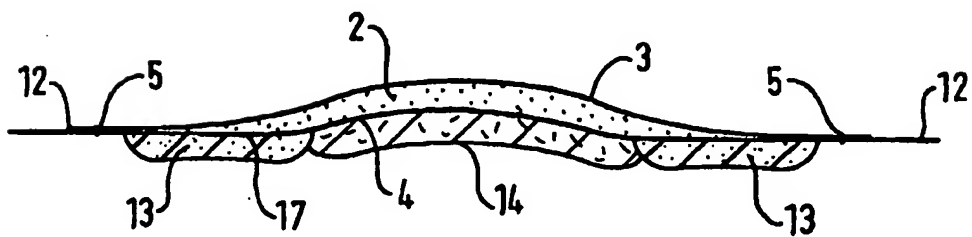

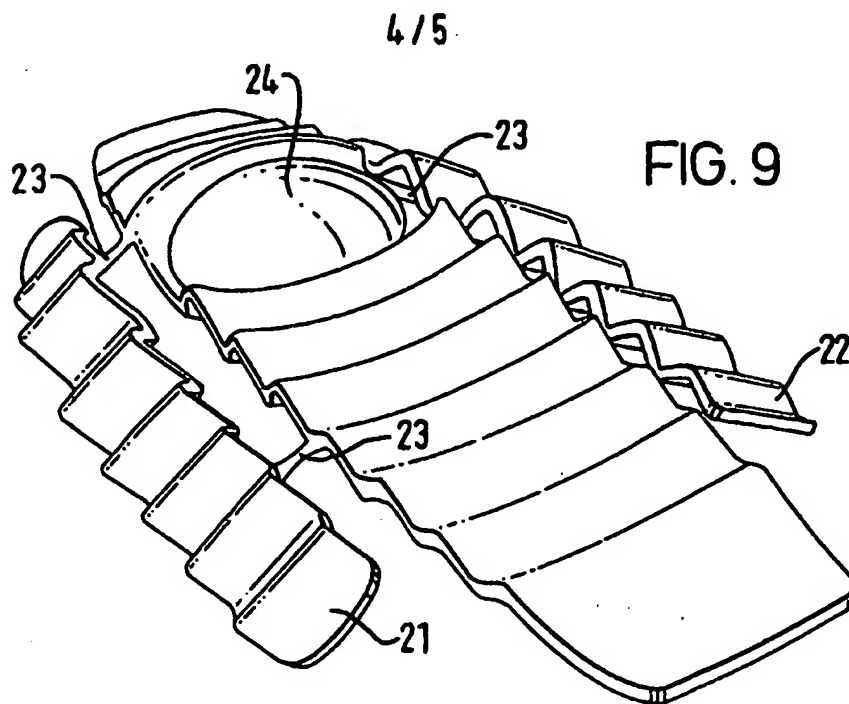

5/5

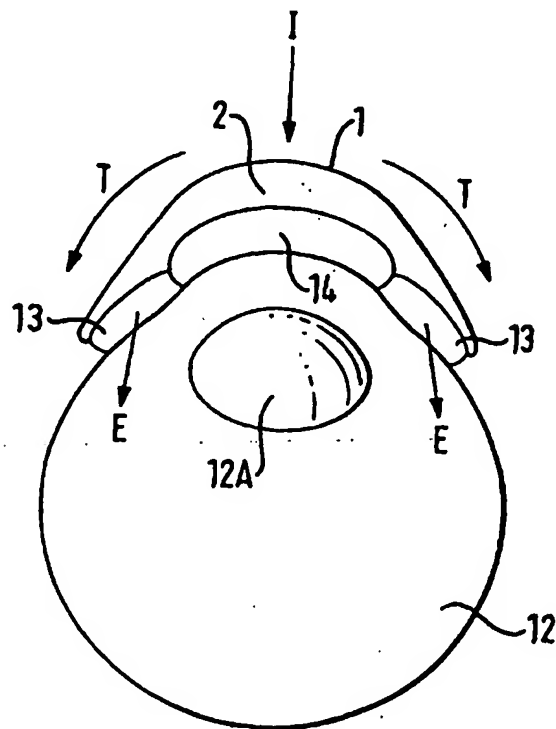


FIG. 11

**2349798**

- 1 -

**Energy Absorbing Protective Member**

This invention relates to a new energy absorbing member which is particularly applicable for protection and is especially suitable for incorporation into garments or apparel worn by people who need their body parts protected against impact. The protective member can also be mounted on an object such as a door frame or wall edge which a person might accidentally come into contact with.

- 10 The protective member of the invention is particularly applicable for use in the medical field, by sportsmen, motor cyclists, urban street wear (cycling/rollerblading), work wear, body armour, riot police gear, oil riggers gear or film crews etc. as well as many other applications such as in crash barriers or as an energy absorbing wall or floor covering.

- 15 One established way of absorbing and/or spreading impact energy is to make a pad out of an energy absorbing material. Such pads are generally made of foam and are either worn by the person who needs protection or attached to the part of the fixture likely to be impacted. Static pads  
20 can be flexible or rigid as they do not need to bend in use. In some applications, a rigid pad is worn by the wearer. For instance, as a shin pad in the case of a rugby or soccer player or a forearm pad in the case of a cricketer as neither of these limb parts need to bend or articulate in use. However, where a joint needs to be protected, a high degree of  
25 flexibility is required so the protective pads need to be made of a flexible material to give the wearer the required level of mobility to make the pad comfortable to wear.

- 2 -

Body impact protection currently available is limited because it is either based on a rigid exterior shell (for example as used as roller blade pads) or upon some form of foam laminate (as used in ski pant inserts). However, foam laminates provide poor levels of protection and rigid shells are uncomfortable to wear.

It is an object of the present invention therefore to provide a protective member which absorbs and spreads impact energy and is soft and flexible yet has high energy absorbing properties. It is a further object of the invention to provide an energy absorbing member which can be permanently attached and tailored into a garment or part thereof.

According to the invention there is provided a protective member comprising an energy absorbing material in an envelope which contains said material in a controlled space, the energy absorbing material remaining malleable until it is subjected to an impact when its characteristics change rendering it temporarily rigid, the material returning to its normal malleable condition after said impact.

Preferably the energy absorbing material is encapsulated in the envelope and absorbs the impact force and spreads the load thereof during the duration of the impact. Preferably the energy absorbing material is a strain rate sensitive material such as a dilatant compound whose mechanical characteristics change on impact.

The preferred material is a Dimethyl siloxane hydroterminated polymer such as the material sold by DOW CORNING under their Catalogue or Trade number 3179.

- 3 -

The encapsulating envelope can be made of foam, fabric, plastic, rubber or metal or a combination of these materials, to contain the energy absorbing material and prevent egress thereof from the envelope. The envelope is however preferably made from an elastomer which conveniently is thermo plastic. A thermoplastic polyester elastomer preferably having a crystalline PBT hard segment with an amorphous glycol soft segment has been found to be particularly suitable. The preferred material is the thermo plastic elastomer sold by Dupont under their Trade Mark HYTREL.  $\Rightarrow$  check this

The encapsulating envelope can be substantially planar but is preferably corrugated along its length. The angle of the sides of each corrugation is not critical but  $54^\circ$  has been found to give excellent energy absorbing results.

The encapsulating envelope has an outer and inner surface and, a flexible foam layer can be attached to said inner surface. For some uses, the foam layer may be attached to only one surface or both the inner and outer surfaces.

In another embodiment, the protective member is a channel shaped segment which is arcuate along its length. A plurality of these segments can be joined together to form a sheet of protective material with the longitudinal axis of one segment at  $90^\circ$  to an adjacent segment. In order to form the sheet, the corners of each segment are connected to the corners of a contiguous segment.

- 4 -

Several embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

- Figure 1 is a perspective view of a protective member of the invention;
- 5 Figure 2 is a cross section of the protective member shown in Figure 1;
- Figure 3 is a perspective view of a corrugated protective member;
- Figure 4 is a cross section through the corrugated protective member of Figure 3;
- Figure 5 is an enlarged view of the portion of the protective member
- 10 circled in Figure 4;
- Figure 6 is a view of a protective segment of the invention;
- Figure 7 is a view of a sheet of material made up from a plurality of interconnected protective segments shown in Figure 6;
- Figure 8 is a perspective view of a person wearing a garment
- 15 incorporating protective members of the invention;
- Figure 9 is a view of another form of protective member of the invention for use as an elbow protector;
- Figure 10 is a cross sectional view of another form of protective member; and
- 20 Figure 11 is a view of the protective member of Figures 8 and 9 in position on a wearer's shin.

Figures 1 and 2 show a protective member 1 of the invention which comprises a quantity of energy absorbing material 2 encapsulated in an

25 envelope comprising an upper layer 3 and a lower layer 4 connected together at their periphery 5 to provide a sealed enclosure for the material 2. The envelope can however be blow moulded from a single piece of material.

- 5 -

← The energy absorbing material 2 can be a strain rate sensitive polymer, a non-Newtonian fluid or a dilatant compound which is normally malleable under low strain rates and behaves in a manner similar to a putty like substance. However, when an impact is applied to the material 2, it momentarily changes from being malleable and instantaneously becomes rigid thereby absorbing and spreading the impact energy. The preferred material is a dimethyl siloxane hydroterminated polymer such as the material manufactured by DOW CORNING and sold under their catalogue or trade No. 3179.

C7  
The encapsulating layers 3 and 4 are preferably made of a thermo plastic elastomer material manufactured by Du Pont and sold under their trade mark HY-TREL. This material is strong enough to withstand the impact energy without the material tearing or fracturing but at the same time allows the impact energy to be transferred through the material layer 3,4 to be absorbed by the putty-like energy absorbing material 2.

This unique multi-layer energy absorbing member can flex with movement of the body when protection is not needed and thus is very comfortable to wear. When impacted however, the strain rate sensitive polymer in the energy absorbing member reacts instantaneously to form a semi-rigid structure that absorbs and dissipates the blow giving maximum protection. Independent tests have confirmed that the energy absorbing member of the invention is substantially more effective than conventional foam and/or plastic systems.

- 6 -


The Active Protection System (APS) of the invention has been impact tested and the results compared with identical impact tests carried out on a known impact protection member sold to motorcyclists under the trade mark "Dianese". In order to record the magnitude of pressure and force distribution on impact, a special film is used which changes colour in accordance with the level of impact pressure that it receives.

In order to carry out the test, a piece of Dianese and APS of the invention were impacted in a comparative test and the four photographs hereafter record the impact.

DIANESE (prior art)

APS (invention)

15




Dianese Outside




APS Outside

20



Dianese Inside



APS Inside

25

(less black shows lower pressure, i.e. better protection).

- 7 -

It can be seen from the photographs that the APS energy absorbing member of the invention performed significantly better than the known "Dianese" pad because only very light grey areas are visible on the inside surface of APS member whereas substantial black areas are visible on the inside surface of the Dianese member. This clearly demonstrates that the APS member of the invention provides a much higher level of protection as comparatively very little force has passed through to its inside surface.

10

Figures 3-5 show an alternative form of energy absorbing member in accordance with the present invention which has a corrugated configuration with a plurality of convolutions to increase its energy absorbing properties. The energy absorbing member comprises the energy absorbing material 2 encapsulated between sheets of HY-TREL 3 and 4 which are sealed at 5 around their periphery to contain the material 2 within the envelope (see Figure 4). The construction of the corrugated energy absorbing member shown in Figures 3-5 is the same as that shown in Figures 1 and 2 except that the member has the series of corrugations 8 along its length. To increase its energy absorbing properties and also for increased comfort, a layer of foam 9 can be attached to inner layer 7 of membrane 4. The envelope has to be of a thickness which is sufficient to enable it to return to its original configuration after impact. 0.5-1.5mm has been found to be particularly satisfactory.

25

Referring now to Figure 5, when an impact load I is applied to the energy absorbing member 1 in the direction of the arrow, the load I will

- 8 -

be dissipated by the apexes 8A of the convolutions down either side thereof which creates shear forces as the material hardens thereby absorbing the impact load. Preferably the apices 8A are curved rather than pointed as this further assists in dissipating the impact load I down either side of each of the corrugations 8.

It should be noted that the foam backing 9 is preferred rather than essential and is usually provided on the inner surface of the energy absorbing member for increased comfort for the wearer.

10

Figure 6 shows an alternative form of energy absorbing member 1 in accordance with the present invention which is particularly suitable for use in making up a sheet of material as shown in Figure 7. Each energy absorbing member 1 comprises an outer membrane 3 and an inner  
15 membrane 4 between which the putty-like energy absorbing material 2 is encapsulated. The energy absorbing member 1 can be channel or arch shaped and conveniently but not essentially has connecting means in the form of a foot or pad 10 at each corner thereof having a hole 11 therein. It can however be cone shaped or of any energy absorbing profile.

20

As can be seen more clearly in Figure 7, the plurality of the channel shaped energy absorbing members 1 can be connected together for instance by means of their feet 10 to form a sheet of material which is flexible and bendable in several planes. Each energy absorbing member  
25 1 of the sheet works in exactly the same way as the energy absorbing member just described in that when an impact load is applied to the sheet of material, the normally malleable energy absorbing material 2 within each member 1 temporarily becomes rigid thereby absorbing the

- 9 -

load, the material 2 returning to its normal malleable state shortly after the impact energy has been absorbed.

The configuration of the sheet illustrated in Figure 7 is only one example  
5 of the way in which a sheet of material can be formed using individual energy absorbing members 1 connected together with their longitudinal axis normal to each other. Other configurations are however possible.

A particularly useful application of energy absorbing members of the  
10 present invention is shown in Figure 8 where an energy absorbing elbow pad 16 and a shoulder pad 17 is incorporated into garment 15. Similar pads can be incorporated into the knee, shin or thigh area of a pair of trousers (not shown).

15 Figure 9 shows a design of elbow pad in accordance with the present invention which comprises an elongate main body section 20 having optional out-riggers 21,22 attached to the main body section by means of spars 23. The main body section 20 has a dome shaped section 24 to receive the wearer's elbow joint. The energy absorbing member  
20 illustrated in Figure 9 is of the same construction as the embodiments already described in that it comprises an energy absorbing putty-like material 2 encapsulated between inner and outer layers 3 and 4 made of HYTREL. The main body section 20 and the out-riggers 21 are corrugated as illustrated and are therefore similar in construction to the  
25 protective member shown in Figures 4-7.

In use, the wearer would place the main body section 20 inside the garment sleeve with their elbow joint located within the dome shaped

- 10 -

section 24. The elongate body section 20 would extend down the wearer's arm generally coaxial therewith and the out riggers 21 and 22 would be folded around the arm on either side thereof. Thus, the elbow region would be protected against direct impacts on the elbow joint itself and also the portions of the arm on either side of the elbow joint would be protected. The protective member shown in Figure 9 can either be inserted within the wearer's sleeve for instance into a stretch pocket or alternatively can be attached to the fabric from which the garment is made as an integral part thereof e.g. by stitching or thermal attachment.

Whilst the embodiment shown in Figure 9 is an elbow pad, it will be appreciated that the design thereof could be changed while still operating in the same way to protect other body parts such as shoulders, knees or hips.

Figures 10 and 11, show a further embodiment of energy absorbing member 1 of the present invention which comprises a textile layer or tube 12 to which an energy absorbing pad of the invention is attached to protect, for example, a knee, elbow or hip joint. The energy absorbing member 1 comprises an outer layer 3 and an inner layer 4 preferably made of a material such as HYTREL between which is encapsulated the putty-like malleable material 2. The edges of the layers 3 and 4 are preferably connected together at 5 to seal the putty-like material within the envelope 3,4. The layers 3 and 4 can however be made of a textile material whose surfaces are coated, preferably with a water proofing material such as polyurethane or any other membrane which will encapsulate and contain the malleable material 2.

- 11 -

To assist its energy absorbing properties, an annular foam ring 13 can be attached to inner surface 7 of the membrane 4. A spacer 14 made from a textile material is preferably provided within the annular foam ring 13 to ensure that the putty layer 2 does not come into contact with the  
5 users limb to be protected.

As can be seen more clearly in Figure 11, when the impact load I is applied to the energy absorbing member 1 fitted to a limb 12 of a wearer, the energy impact is initially dissipated laterally in the directions  
10 of arrows T thereby deflecting the impact load I away from the wearer's shin bone 12A. The initial impact is absorbed by the putty-like material 2 which changes from its malleable state to its rigid state but the load is then transferred laterally to the outer edges of the member 1 where it is absorbed as load E in the foam ring 3 and the soft skin or muscle of the  
15 wearer's limb 12. It will be appreciated that the energy absorbing member just described and illustrated moves the impact force I away from the bone 12A and into layer 3 and the fatty tissue in the leg. The energy absorbing member 1 can be shaped to include the convoluted sections 8 shown in Figures 3-5 or 9.

20

The Active Protection System (APS) of the invention protects the human body from abrasions and impacts. This flexible system can be incorporated directly into a garment. The APS is malleable under normal conditions and will easily conform to the movements of the body  
25 and is therefore non-restrictive. Upon impact the APS becomes momentarily rigid, spreading and absorbing the impact force before returning to its normal flexible, comfortable state.

- 12 -

The APS is made from two materials combined in layers. The heart of the system is the active strain rate sensitive polymer material 2 which reacts to impact, and is encapsulated in the flexible outer sheath 3,4. The system has been designed to work synergistically producing a significant increase in impact performance, over and above that of either material in isolation.

- 13 -

### Claims

1. A protective member comprising an energy absorbing material in an envelope which contains said material in a controlled space, the material remaining soft and flexible until it is subjected to an impact when its characteristics change rendering it temporarily rigid, the material returning to its normal flexible condition after said impact.
2. A protective member as claimed in claim 1 wherein the energy absorbing material is encapsulated in the envelope.
3. A protective member as claimed in claim 1 or claim 2 wherein the mechanical characteristics of the material change on impact.
4. A protective member as claimed in any preceding claim wherein the energy absorbing material will absorb energy and spread the load thereof for the duration of the impact.
5. A protective member as claimed in any preceding claim wherein the energy absorbing material is a strain rate sensitive material.
6. A protective member as claimed in any preceding claim wherein the energy absorbing material is a dilatant compound.
7. A protective member as claimed in any preceding claim wherein the energy absorbing material is a dimethyl siloxane hydroterminated polymer.

- 14 -

8. A protective member as claimed in any preceding claim wherein the energy absorbing material is made by DOW CORNING and sold under catalogue number 3179.
- 5 9. A protective member as claimed in any preceding claim wherein the encapsulating envelope is substantially planar.
- 10 10. A protective member as claimed in any of claims 1-8 wherein the encapsulating envelope is corrugated along its length and comprises a plurality of wave shaped convolutions.
11. A protective member as claimed in claim 10 wherein the angle of the sides of each convolution is  $54^{\circ}$ .
- 15 12. A protective member as claimed in any preceding claim wherein the encapsulating envelope has an inner face to which a flexible foam layer is attached.
- 20 13. A protective member as claimed in any of claims 1-8 wherein the protective envelope is channel shaped and arcuate along its length to provide a protective segment.
- 25 14. A protective member as claimed in any preceding claim wherein the encapsulating envelope is made of foam, fabric, plastic, rubber or metal or a combination of these materials, to contain the energy absorbing material and prevent egress thereof from the envelope.

- 15 -

15. A protective member as claimed in any preceding claim wherein the envelope is made of an elastomer.
16. A protective member as claimed in claim 10 wherein the elastomer  
5 is a thermoplastic elastomer.
17. A protective member as claimed in claim 16 wherein the elastomer is a polyester elastomer.
- 10 18. A protective member as claimed in claim 17 wherein the elastomer has a crystalline PBT hard segment with an amorphous glycol soft segment.
- 15 19. A protective member as claimed in any of claims 14-18 wherein the envelope is made of the thermoplastic elastomer sold by DuPont under the Trade Mark HYTREL.
- 20 20. A sheet of protective material made from a plurality of protective segments as claimed in claim 13 wherein a plurality of said segments are connected together to form the sheet.
- 25 21. A sheet of protective material as claimed in claim 20 wherein each segment has a longitudinal axis and one segment is connected to an adjacent segment with its longitudinal axis at 90° thereto.
22. A sheet of protective material as claimed in claim 20 or claim 21 wherein each segment has means thereon to enable it to be connected to

- 16 -

an adjacent segment, the edges of contiguous segments being joined together to form the sheet.

23. A sheet of protective member as claimed in claim 22 wherein the connecting means are feet.

24. A length of textile material with a protective member or protective sheet as claimed in any of claims 1-19 or claims 20-23 permanently attached thereto.

10

25. A garment or part thereof made from a textile material as claimed in claim 24.

26. A protective member substantially as herein described with reference to Figures 1-6 or Figures 8-11.

27. A sheet of protective material substantially as herein described with reference to Figure 7 of the accompanying drawings.



The  
Patent  
Office

17



INVESTOR IN PEOPLE

Application No: GB 0011587.3

Examiner: GRAHAM  
WERRETT

Claims searched: 1-27

Date of search: 20 July 2000

**Patents Act 1977**  
**Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.R): A3V.

Int CI (Ed.7):

Other: Online : WPI, EPODOC, PAJ.

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X	US 5854143 (SCHUSTER)	1 at least.
X	US 5599290 (HAYES) see e.g.; Col. 17, l. 54 on; Col. 10, l. 37 on.	"
X	US 5090053 (HAYES)	"
X	US 3649426 (GATES) see e.g. Col. 2, ll 43 & 44; Col. 3, l. 62 on.	"

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent documents published on or after, but with priority date earlier than, the filing date of this application.